


PV-LGxx200 (xxx 200W, PFC)

Features

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built_in active PFC function
- Fully encapsulated with IP67 level
- UL60950 Class 2 power unit, pass LPS
- Cooling by free air convection
- 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Damp / wet location outdoor application
- 2 years warranty

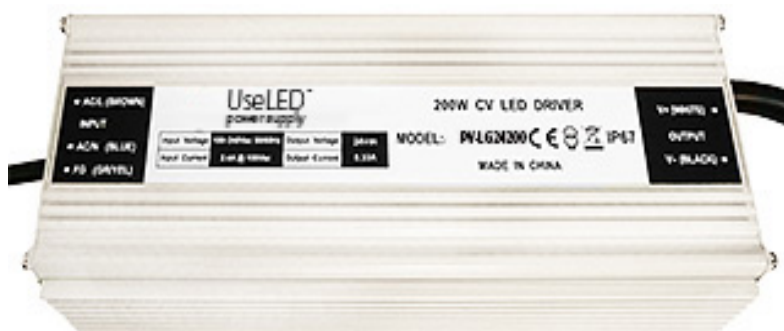


Specification


OUTPUT	MODEL	LGA200P-24	LGA200P-12
	DC VOLTAGE	24V	12V
	RATED CURRENT	8330mA	16700mA
	RATED POWER	200W	
	RIPPLE & NOISE (max.)	max:3% VO Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor.	
	VOLTAGE TOLERANCE	±3.0%	
	LINE REGULATION	±1.0%	
	LOAD REGULATION	±2.0%	
	SETUP,RISE TIME	1000ms, 80ms / 230VAC 1000ms, 80ms / 115VAC at full load	
	HOLD UP TIME (Typ.)	60ms / 230VAC 30ms / 115VAC at full load	
INPUT	VOLTAGE RANGE	100 ~ 240VAC	
	VOLTAGE RANGE	100 ~ 240VAC	
	FREQUENCY RANGE	47 ~ 63Hz	
	POWER FACTOR	PF>0.95/230VAC PF>0.98/115VAC at full load PF≥0.9 at 75 ~ 100% load, 115VAC / 230VAC	
	EFFICIENCY(Typ.)	88.0%	87.0%
	AC CURRENT(at full load)	1.1A / Measured at full load and 230 Vac input. 2.2A / Measured at full load and 115 Vac input.	
	INRUSH CURRENT (max.)	65A At 230Vac input 25 Cold Start	
	LEAKAGE CURRENT	<1mA / 240VAC	
PROTECT ON	OVER CURRENT	95 ~ 108% Protection type : Constant current limiting, recovers automatically after fault condition is removed	
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed	
	OVER VOLTAGE	29~36V	14.5~18V
	OVER TEMPERATURE	Tj 140 typically(U1) Detect on main control IC Protection type : Shut down o/p voltage, recovers automatically after temperature goes down	

ENVIRONMENT	WORKING TEMP.	-30 ~ +50 @ full load ; +70 @ 50% load
	WORKING HUMIDITY	20~95% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40~80°C, 10~95% RH
	TEMP.COEFFICIENT	±0.03%/°C (0~50°C)
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS	Design refer to UL1310 Class 2, TUV EN60950-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91, meet IP67
	WITHSTAND VOLTAGE	I/P-O/P:3.0KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25~70% RH
	EMI CONDUCTION & RADIATION	Compliance to EN55015, EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2 Class C (≥75% load) ; EN61000-3-3
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, EN61547, light industry level , criteria A
	DIMENSION	241x96x49.5mm (LxWxH)

Mechanical specification

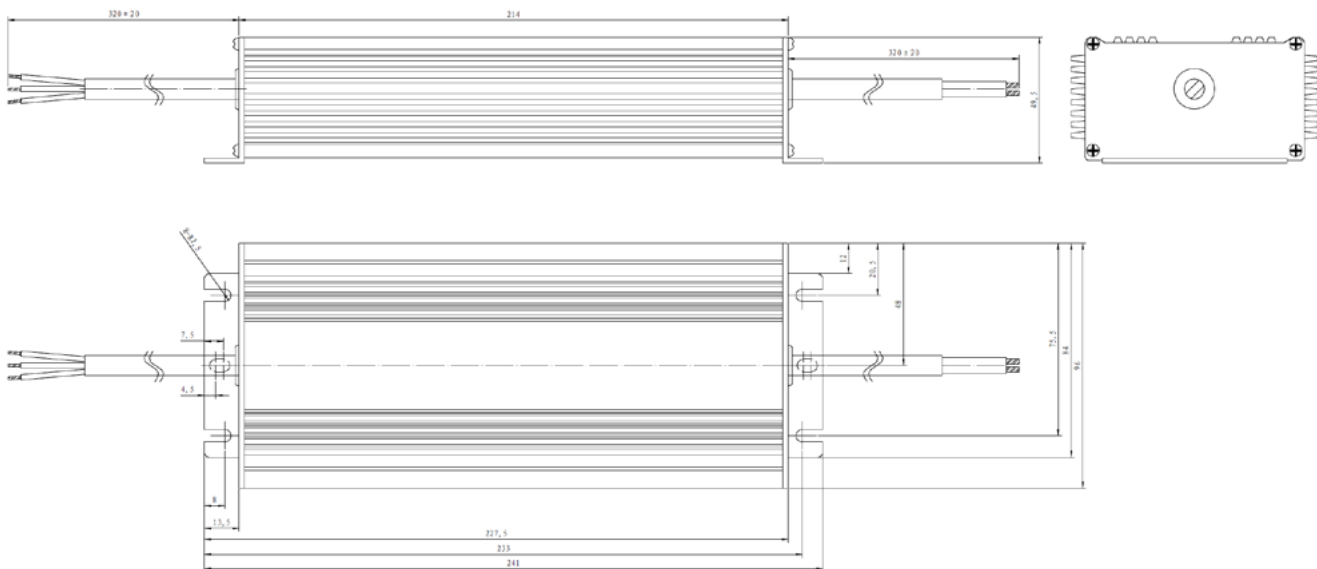

Block Diagram

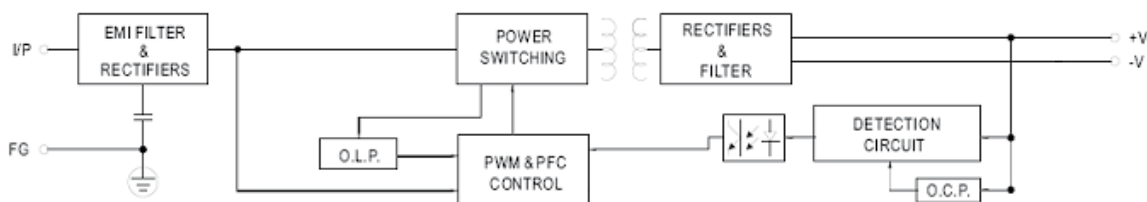

Derating Curve:

